

'Pro' Hex Head Screws

TECHNICAL DATA SHEET



PRODUCT FEATURES

- No pre-drilling required
- Fix 2/3 plies from one side only
- Easy & quick to install
- Metric hex head drive tool
- UK compatible lengths
- Excellent structural properties
- Competitively priced
- Compliant with EN 14592
- Service class 2 corrosion resistant
- Screw length stamped on head

APPLICATIONS

- Multi-ply roof trusses/girders
- Multi-ply open web beams
- Multi-ply EWP (LVL, glulam)
- Multi-ply lintels, trimmers
- Closed panel timber frame
- Panel holding down

SPECIFICATIONS



- 8mm hex head drive tool
- Four lengths:
 - 88mm
 - 141mm
 - 188mm
 - 238mm
- Thread length: 45mm
- Plain shank diameter: 4.75mm
- Outer thread diameter: 6.3mm
- Inner thread diameter: 4.3mm

DESIGN PROPERTIES (EC5)



- $M_{y,k} = 10,000 \text{ Nmm}$
- Design diameter, $d = 4.75\text{mm}$
- Withdrawal parameter:
 $f_{ax,k} = 7\text{N/mm}^{2**}$
- Head pull-through parameter:
 $f_{head,k} = 30\text{N/mm}^{2**}$
 $**(\rho_k=350\text{kg/m}^3)$

'Pro' Hex Head Screws



TECHNICAL DATA SHEET

MINIMUM SCREW SPACING / DISTANCES

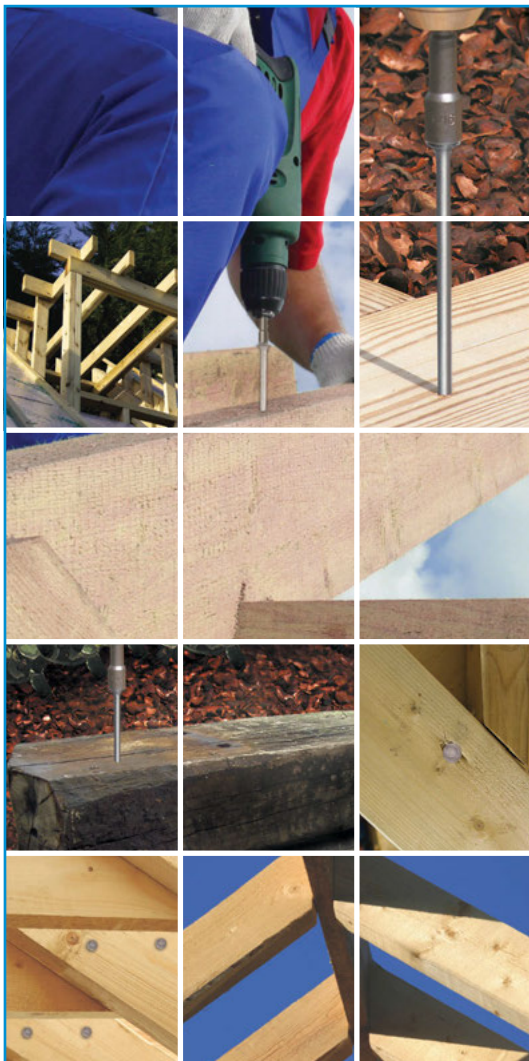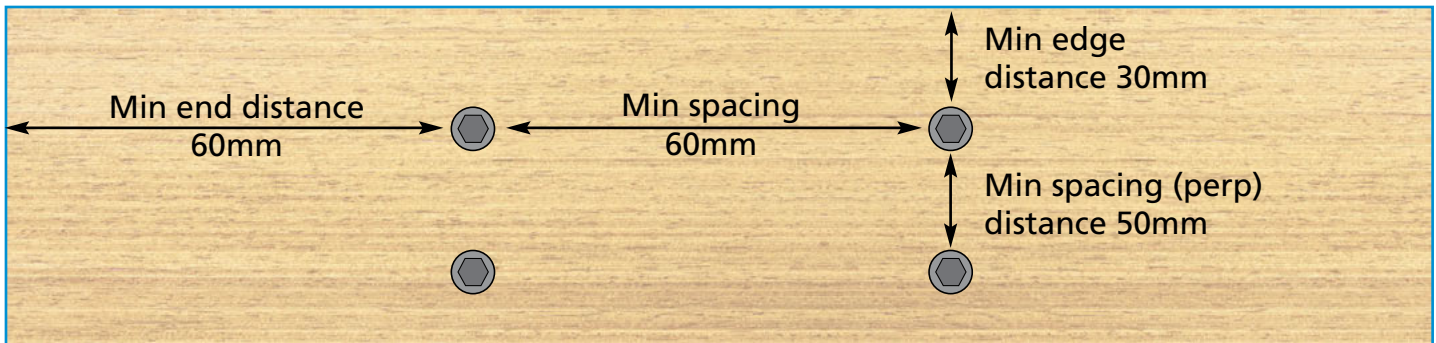

FREE SAMPLE PACKS

Free sample packs are available to assist builders, specifiers and architects.

Please call OSC now for a free pack:
0845 241 9862
sales@oscsales.com



TECHNICAL ENQUIRIES

For technical enquiries please contact:
01256 892211
luke.whale@c4ci.eu